



HP Color LaserJet Enterprise Flow MFP M880z, Print, copy, scan, fax, 200-sheet ADF; Front-facing USB printing; Scan to email/PDF; Two-sided printing

Brand : HP

Product family: Color LaserJet Enterprise Flow **Product code:** A2W75A

Product name : HP Color LaserJet Enterprise flow MFP M880z, Print, copy, scan, fax, 200-sheet ADF; Front-facing USB printing; Scan to email/PDF; Two-sided printing



- 200-sheet ADF; Front-facing USB printing; Scan to email/PDF; Two-sided printing
 - Print, copy, scan, fax
 - Up to 46 ppm (black) and 46 ppm (colour)
 - Up to 1200 x 1200 dpi
- Color LaserJet Enterprise flow M880z Multifunction Printer

HP Color LaserJet Enterprise Flow MFP M880z, Print, copy, scan, fax, 200-sheet ADF; Front-facing USB printing; Scan to email/PDF; Two-sided printing:

This top-of-the-line enterprise MFP helps streamline workflows and accelerate document tasks with advanced finishing options and file sharing. Give users simple, direct access to this MFP through mobile printing and touch-to-print capabilities^[1,2].



Printing		Network	
Duplex printing mode	Auto	Ethernet LAN *	✓
Print resolution colour	1200 x 1200 DPI	Cabling technology	10/100/1000Base-T(X)
Print resolution black	1200 x 1200 DPI	Ethernet LAN data rates	10,100,1000 Mbit/s
Print technology *	Laser	Wi-Fi Direct	✓
Printing *	Colour printing	Security algorithms	EAP-PEAP, EAP-TLS, FIPS 140, HTTPS, IPsec, SNMPv3, SSL/TLS
Duplex printing *	✓	Mobile printing technologies	Apple AirPrint, HP ePrint, Mopria Print Service
Maximum resolution *	1200 x 1200 DPI	Performance	
Print speed (black, normal quality, A4/US Letter) *	46 ppm	Maximum internal memory	2548 MB
Print speed (colour, normal quality, A4/US Letter)	46 ppm	Memory slots	1
Print speed (black, normal quality, A3)	22 ppm	Internal storage capacity	500 GB
Print speed (colour, normal quality, A3)	22 ppm	Internal memory *	2560 MB
Time to first page (black, normal)	8 s	Built-in processor	✓
Time to first page (colour, normal)	8 s	Processor frequency	800 MHz
N-in-1 print function	✓	Sound pressure level (printing)	54 dB
Watermark printing	✓	Sound pressure level (scanning)	54 dB
Secure printing	✓	Design	
Booklet printing function	✓	Product colour *	Grey
Copying		Market positioning *	Business
Duplex copying *	✓	Built-in display *	✓
Copying *	Colour copying	Display	LCD
Maximum copy resolution *	600 x 600 DPI	Display diagonal	20.3 cm (8")
		Touchscreen	✓

Copying		Design	
Copy speed (black, normal quality, A4)	46 cpm	Control type	Touch
Copy speed (colour, normal quality, A4)	46 cpm	Colour display	✓
Maximum number of copies	9999 copies	Power	
Copier resize	25 - 400%	Power consumption (average operating)	972 W
Auto fit function	✓	Power consumption (PowerSave)	1.2 W
Scanning		Power consumption (printing)	972 W
Duplex scanning *	✓	Power consumption (copying)	972 W
Scanning *	Colour scanning	Power consumption (ready)	80 W
Optical scanning resolution *	600 x 600 DPI	Power consumption (sleep)	8 W
Maximum scan area	297 x 432 mm	Power consumption (off)	0.4 W
Scanner type *	Flatbed & ADF scanner	Energy Star Typical Electricity Consumption (TEC)	0.734 kWh/week
Scan technology	CCD	AC input voltage	110 - 240 V
Scan to	E-mail, Network folder, USB	AC input frequency	50/60 Hz
Scan speed (colour)	68 ppm	Brand-specific features	
Scan speed (black)	70 ppm	HP Auto-On/Auto-Off	✓
Image formats supported	JPEG, MTIFF, TIFF		(ABT) 887111382436; (ABY) 887111382443; (ACQ) 887111382450; (B13) 888182820889; (B19) 887111382467; (BAZ) 887111382474
Document formats supported	CSV, HTML, PDF, RTF, UNICODE, XPS	HP GTIN (EAN/UPC) with options	887111382436, 887111382443, 887111382450, 888182820889, 887111382467, 887111382474
Input colour depth	24 bit	HP GTIN (EAN/UPC)	
Greyscale levels	256	System requirements	
Fax		Windows operating systems supported	Windows Vista, Windows 8, Windows 7, Windows XP, Windows 10
Faxing *	Mono faxing	Mac operating systems supported	Mac OS X 10.8 Mountain Lion, Mac OS X 10.7 Lion, Mac OS X 10.6 Snow Leopard
Fax resolution (black)	300 x 300 DPI	Linux operating systems supported	✓
Fax transmission speed	3 sec/page	Server operating systems supported	Windows Server 2008, Windows Server 2003, Windows Server 2012
Modem speed	33.6 Kbit/s	Other operating systems supported	Novell, Android, Linux
Auto-redialing	✓	Operational conditions	
Speed dialling	✓	Operating relative humidity (H-H)	10 - 80%
Fax speed dialling (max numbers)	100	Recommended humidity operating range	10 - 80%
Fax forwarding	✓	Operating temperature (T-T)	15 - 30 °C
Fax broadcasting	100 locations	Certificates	
Fax delayed sending	✗	Certification	CISPR 22:2008 / EN 55022:2010 (Class A), EN 61000-3-2 :2006 +A1:2009 +A2:2009; EN 61000-3-3 :2008; EN 55024:2010; FCC Title 47 CFR, Part 15 Class A(USA); ICES-003, Issue 4 (Canada); EMC Directive 2004/108/EC with CE Marking (Europe); other EMC approvals as required by individual countries
Auto reduction	✓	Sustainability	
Features		Sustainability compliance	✓
Recommended duty cycle	5000 - 25000 pages per month	Sustainability certificates	ENERGY STAR, EPEAT Silver
Maximum duty cycle *	200000 pages per month	Sustainable technologies and materials	Mercury free
Duplex functions *	Print, Copy, Scan	Doesn't contain	Mercury
Digital sender	✓	Weight & dimensions	
Number of print cartridges *	4	Width	704 mm
Printing colours *	Black, Cyan, Magenta, Yellow	Depth	635 mm
Page description languages	PCL 5, PCL 6, PostScript 3, PDF	Height	1199 mm
Printer fonts	PostScript, Scalable, TrueType, Windows		
All-In-One-multitasking	✓		
Country of origin	China, Mexico		
HP segment	Business		
Input & output capacity			
Total number of input trays *	5		
Total input capacity *	2100 sheets		
Total output capacity *	500 sheets		
Paper tray 1 input capacity	100 sheets		
Paper tray 2 input capacity	500 sheets		
Multi-Purpose tray	✓		
Multi-Purpose tray input capacity	100 sheets		
Paper input type	Paper tray		
Auto document feeder (ADF)	✓		
Auto document feeder (ADF) input capacity	200 sheets		
Maximum number of input trays	5		

Input & output capacity		Weight & dimensions	
Maximum input capacity	2100 sheets	Weight	150.6 kg
Maximum output capacity	3000 sheets	Packaging data	
Paper handling		Package width	856 mm
Maximum ISO A-series paper size *	A3	Package depth	790 mm
Maximum print size	312 x 457.2 mm	Package height	1567 mm
Paper tray media types *	Cut sheet, Envelopes, Glossy paper, Labels, Photo paper, Transparencies	Package weight	173.3 kg
ISO A-series sizes (A0...A9) *	A3, A4, A5, A6	Packaging content	
ISO B-series sizes (B0...B9)	B5	Cables included	AC
ISO C-series sizes (C0...C9)	C5, C6	Bundled software	HP PCL 6 Discrete Printer Driver; Mac SW Link to Web (Mac Installer); Windows Installer
Non-ISO print media sizes	16K, 2L	Logistics data	
JIS B-series sizes (B0...B9)	B4, B5, B6	Harmonized System (HS) code	84433100
Envelopes sizes	B5, C5, C6, DL	Pallet gross weight	173.33 g
Custom media width	76.2 - 320 mm	Layers per pallet	1 pc(s)
Custom media length	127 - 457.2 mm	Products per pallet	1 pc(s)
Paper tray media weight	60 - 220 g/m ²	Technical details	
Ports & interfaces		Master (outer) cases per pallet layer	1 pc(s)
Standard interfaces	Ethernet, USB 2.0	Other features	
Direct printing *	✓	Pallet dimensions (W x D x H)	856 x 790 x 1567 mm
USB port	✓	Recommended system requirements	Windows 10, Windows 8, Windows 7 SP1+, Windows Vista, Windows Server 2003 (SP1+), Windows Server 2008, Windows Server 2008 R2 (64 bit), Windows Server 2012 (64-bit), Windows XP (SP2+); CD-ROM or DVD drive, or Internet connection; Dedicated universal serial bus (USB 1.1 or 2.0), or network connection; 200 MB available hard disk space; Operating system compatible hardware system requirements see http://www.micr
USB 2.0 ports quantity	3	Acoustic power emissions (ready)	50 dB
Network		Acoustic pressure emissions bystander (ready)	33 dB
Wi-Fi *	✗		



0887111382504



887111382504



0887111382474



887111382474



0887111382429



887111382429



0887111779533



887111779533



0887111382511



887111382511



0887111382481



887111382481



0887111382443



887111382443



0887111382436



887111382436



0887111382399



887111382399



0887111382405



887111382405



0887111382498



887111382498



0887111382382



887111382382



0887111382375



887111382375




0887111382368



887111382368



0887758944745



887758944745



0888793628492



888793628492



0888793628515



888793628515



0887758944738



887758944738



0887111382450




887111382450



0887111382412



887111382412

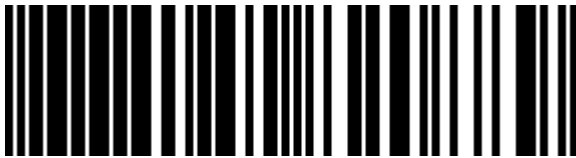

0888182820889



888182820889



0887111382467



887111382467

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.