



# HP Smart Tank 750 All-in-One Thermal inkjet A4 4800 x 1200 DPI 15 ppm Wi-Fi

**Brand :** HP

**Product family:** Smart Tank

**Product code:** 6UU47A

**Product name :** Smart Tank  
750 All-in-One

- 35-sheet ADF; Scan to PDF; Two-sided printing
  - Print, Copy, Scan, Fax, ADF and Wireless
  - Print speed up to 15 ppm (black) and 9 ppm (color)
  - Up to 1200 x 1200 rendered dpi
- Smart Tank 7605 All-in-One

HP Smart Tank 750 All-in-One Thermal inkjet A4 4800 x 1200 DPI 15 ppm Wi-Fi:

## Full of productivity. Full of savings.

HP Smart Tank 750 All-in-One. Print technology: Thermal inkjet, Printing: Colour printing, Maximum resolution: 4800 x 1200 DPI, Print speed (colour, normal quality, A4/US Letter): 9 ppm. Copying: Colour copying, Maximum copy resolution: 600 x 600 DPI. Scanning: Colour scanning, Optical scanning resolution: 1200 x 1200 DPI. Faxing: Colour faxing. Duplex functions: Copy, Print, Scan. Maximum ISO A-series paper size: A4. Wi-Fi. Direct printing. Product colour: Grey



| Printing  |                 | Paper handling                  |  |
|---|-----------------|---------------------------------|--|
| Duplex printing mode                                | Auto            | Maximum print size              | 216 x 355.6 mm   |
| Print resolution colour                             | 4800 x 1200 DPI | Paper tray media types *        | Glossy paper, Matte paper, Photo paper, Plain paper, Recycled paper, Thick paper |
| Print resolution black                              | 1200 x 1200 DPI | ISO A-series sizes (A0...A9) *  | A4, A5, A6   |
| Print technology *                                  | Thermal inkjet  | ISO C-series sizes (C0...C9)    | C5, C6   |
| Printing *  | Colour printing | Non-ISO print media sizes       | Hagaki card, Legal   |
| Duplex printing *                                   | ✓               | JIS B-series sizes (B0...B9)    | B5   |
| Maximum resolution *                                | 4800 x 1200 DPI | Envelopes sizes                 | C5, C6, DL   |
| Print speed (black, normal quality, A4/US Letter) * | 15 ppm          | Borderless printing media sizes | A4, Letter   |
| Print speed (colour, normal quality, A4/US Letter)  | 9 ppm           | Custom media width              | 88.9 - 215.9 mm  |
| Print speed (black, draft quality, A4/US Letter)    | 23 ppm          | Custom media length             | 127 - 355.6 mm   |
| Print speed (colour, draft quality, A4/US Letter)   | 22 ppm          | Paper tray media weight         | 60 - 250 g/m <sup>2</sup>  |
| Print speed (ISO/IEC 24734) black                   | 15 ppm          | Ports & interfaces              |  |
| Print speed (ISO/IEC 24734) colour                  | 9 ppm           | Direct printing *               | ✓  |
| Time to first page (black, normal)                  | 14 s            | USB port                        | ✓  |
| Time to first page (colour, normal)                 | 16 s            | USB 2.0 ports quantity          | 1  |
| Borderless printing                                 | ✓               | Network                         |  |
| Copying   |                 | Wi-Fi *                         | ✓  |
| Duplex copying *                                    | ✓               | Ethernet LAN *                  | ✓  |
| Copying *   | Colour copying  | Wi-Fi standards                 | 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)                 |
| Maximum copy resolution *                           | 600 x 600 DPI   | Wi-Fi Direct                    | ✓  |
| Copy speed (black, normal quality, A4)              | 13 cpm          | Bluetooth                       | ✓  |
| Copy speed (colour, normal quality, A4)             | 6 cpm           | Mobile printing technologies    | Apple AirPrint, Mopria Print Service   |
| Maximum number of copies                            | 99 copies       | Performance                     |  |
| Copier resize                                       | 25 - 400%       | Maximum internal memory         | 256 MB   |
| ID-card copy function                               | ✓               | Internal memory *               | 256 MB   |
| Auto fit function                                   | ✓               | Built-in processor              | ✓  |
| Scanning  |                 | Processor frequency             | 800 MHz  |
| Duplex scanning *                                   | ✗               | Sound power level (printing)    | 6.5 dB   |
| Scanning *  | Colour scanning | Design                          |  |
|   |                 | Product colour *                | Grey   |

|   |   |   |  |
|---|---|---|--|
| <b>Scanning</b>                           |   | <b>Design</b>                                     |  |
| Optical scanning resolution *             | 1200 x 1200 DPI   | Market positioning *                              | Home & office  |
| Maximum scan resolution                   | 1200 x 1200 DPI   | Built-in display *                                | ✓  |
| Maximum scan area                         | 216 x 297 mm  | Display   | LCD  |
| Scanner type *                            | Flatbed & ADF scanner   | Control type                                      | Buttons  |
| Scan technology                           | CIS   | <b>Power</b>                                      |  |
| Scan to                                   | Software, E-mail Server   | Power consumption (sleep)                         | 1.1 W  |
| Image formats supported                   | BMP, JPG, PNG, TIFF   | Power consumption (off)                           | 0.1 W  |
| Document formats supported                | PDF   | Energy Star Typical Electricity Consumption (TEC) | 0.2 kWh/week   |
| Input colour depth                        | 24 bit  | AC input voltage                                  | 100 - 240 V  |
| Greyscale levels                          | 256   | AC input frequency                                | 50/60 Hz   |
| Scan drivers                              | TWAIN   | <b>Brand-specific features</b>                    |  |
| <b>Fax</b>                                |   | HP Auto-On/Auto-Off                               | ✓  |
| Faxing *                                  | Colour faxing   | <b>System requirements</b>                        |  |
| Fax resolution (black)                    | 300 x 300 DPI   | Windows operating systems supported               | Windows 7, Windows 10, Windows 11  |
| Fax resolution (colour)                   | 200 x 200 DPI   | Mac operating systems supported                   | Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 11.0 Big Sur  |
| Modem speed                               | 33.6 Kbit/s   | <b>Operational conditions</b>                     |  |
| Fax memory                                | 100 pages   | Operating relative humidity (H-H)                 | 15 - 80%   |
| Auto-redialing                            | ✓   | Recommended humidity operating range              | 20 - 80%   |
| Fax forwarding                            | ✓   | Storage temperature (T-T)                         | -40 - 60 °C  |
| Fax delayed sending                       | ✓   | Operating temperature (T-T)                       | 5 - 40 °C  |
| Auto reduction                            | ✓   | Non-operating relative humidity (non-condensing)  | 5 - 90%  |
| <b>Features</b>                           |   | Storage relative humidity (H-H)                   | 5 - 90%  |
| Recommended duty cycle                    | 400 - 800 pages per month   | <b>Certificates</b>                               |  |
| Maximum duty cycle *                      | 5000 pages per month  | Certification                                     | CISPR 32:2015/EN 55032:2015+A11:2020 Class B; CISPR24:2010+A1:2015/EN 55024:2010+A1:2015; EN55035:2017+A11:2020/CISPR35:2016; EN 61000-3-2:2019; EN 61000-3-3:2013+A1:2019; FCC CFR 47 Part 15 Subpart B; ICES-003 Issue 7:2020; EN 301 489-1 V2.2.3; EN 301 489-17 V3.2.2 |
| Duplex functions *                        | Copy, Print, Scan   | <b>Sustainability</b>                             |  |
| Number of print cartridges *              | 4   | Sustainability compliance                         | ✓  |
| Printing colours *                        | Black, Cyan, Magenta, Yellow  | Sustainability certificates                       | Post-Consumer Recycled Plastic   |
| Page description languages                | PCL 3 GUI   | <b>Weight &amp; dimensions</b>                    |  |
| All-In-One-multitasking                   | ✓   | Width   | 427.5 mm   |
| Country of origin                         | China   | Depth   | 364 mm   |
| Replacement cartridges                    | HP GT53 90-ml Black Original Ink Bottle 1V22AE; HP GT53XL 135-ml Black Original Ink Bottle 1V21AE; HP GT52 Cyan Original Ink Bottle M0H54AE; HP GT52 Magenta Original Ink Bottle M0H55AE; HP GT52 Yellow Original Ink Bottle M0H56AE; HP GT51XL 135-ml Black Original Ink Bottle X4E40AE; HP GT53 90-ml Black Original Ink Bottle 1V22AL; HP GT52 Cyan Original Ink Bottle M0H54AL; HP GT52 Magenta Original Ink Bottle M0H55AL; HP GT52 Yellow Original Ink Bottle M0H56AL; HP GT52 3-pack Cyan/Magenta/Yellow Original Ink Bottles X4E44AL; HP GT51 Black Original Ink Bottle M0H57AL; HP GT53 90-ml Black Original Ink Bottle 1V22AA; HP GT53XL 135-ml Black Original Ink Bottle 1V21AA; HP GT52 Cyan Original Ink Bottle M0H54AA; HP GT52 Magenta Original Ink Bottle M0H55AA; HP GT52 Yellow Original Ink Bottle M0H56AA. For more information about fill and yield see <a href="http://www.hp.com/go/learnaboutsupplies">www.hp.com/go/learnaboutsupplies</a> | Height  | 240.3 mm   |
| HP segment                                | Home  | Weight  | 7.7 kg   |
| <b>Input &amp; output capacity</b>        |   | <b>Packaging data</b>                             |  |
| Total number of input trays *             | 1   | Package width                                     | 484 mm   |
| Total input capacity *                    | 250 sheets  | Package depth                                     | 284 mm   |
| Total output capacity *                   | 100 sheets  | Package height                                    | 410 mm   |
| Auto document feeder (ADF)                | ✓   | Package weight                                    | 10.7 kg  |
| Auto document feeder (ADF) input capacity | 35 sheets   | <b>Packaging content</b>                          |  |
|   |   | Cables included                                   | AC   |
|   |   | Warranty card                                     | ✓  |
|   |   | Bundled software                                  | HP Printer Software, available online  |
|   |   | <b>Logistics data</b>                             |  |
|   |   | Pallet gross weight                               | 428 g  |
|   |   | Layers per pallet                                 | 6 pc(s)  |
|   |   | Products per pallet                               | 48 pc(s)   |

| Input & output capacity           |            | Technical details                             |  |
|-----------------------------------|------------|---|--|
| Maximum number of input trays     | 1          | Master (outer) cases per pallet layer 8 pc(s) |  |
| Maximum input capacity            | 250 sheets | Other features                                |  |
| Maximum output capacity           | 100 sheets | Number of users                               | 3 user(s)  |
| Paper handling                    |            | Pallet dimensions (W x D x H)                 | 1220 x 1016 x 2590 mm  |
| Maximum ISO A-series paper size * | A4         | Recommended system requirements               | Windows 10, 7: 32-bit or 64-bit, 2 GB available hard disk space, Internet connection, Internet Explorer. |
|                                   |            | PictBridge                                    | ✘  |
|                                   |            | Pallet dimensions (W x D x H) (imperial)      | 1219.2 x 1016 x 2590.8 mm (48 x 40 x 102")   |
|                                   |            | Number of print heads                         | 2  |



0195908303138



195908303138



0195908303145




195908303145



0195908303152




195908303152

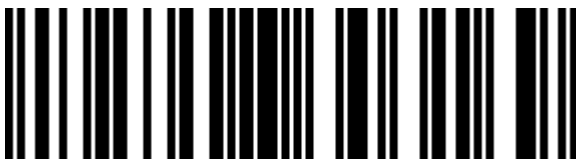

0195908303169




195908303169

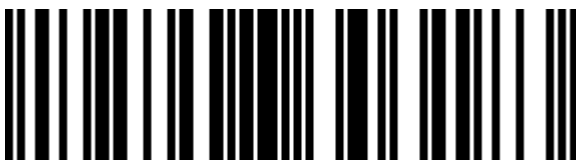

0195908303183



195908303183

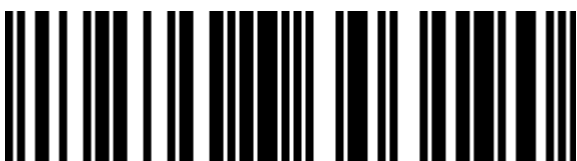

0195908303190



195908303190



0195908303206



195908303206



0195908303213



195908303213



0195908303220



195908303220



0195908303237



195908303237



0195908303114



195908303114



0195908303121



195908303121



0197029095527



197029095527

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.