

pinnpos




PP-TAM-17

Resistive

Features

pinnpos

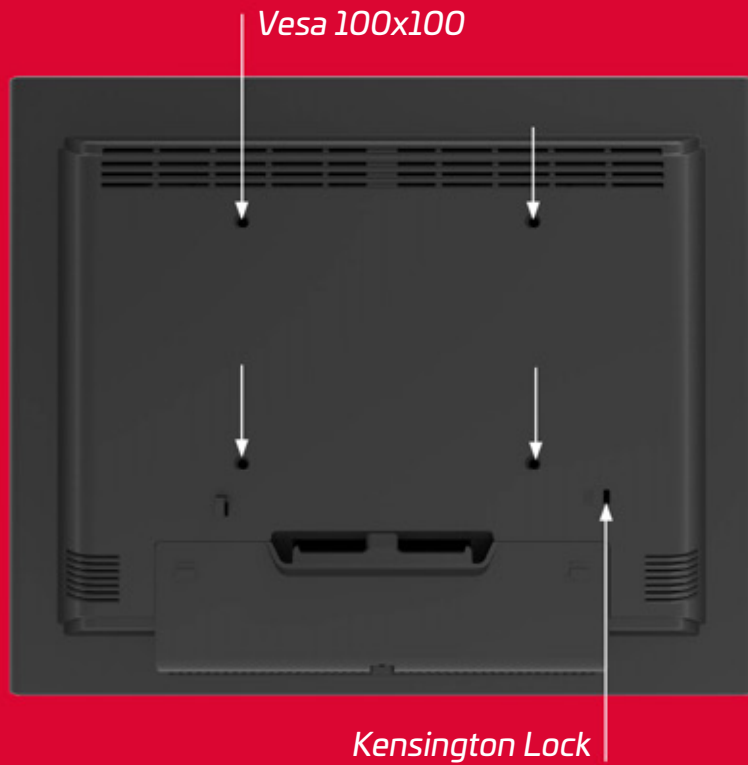

Specification



PP-TAM-17	
Size	17" TFT LCD
Maximum Resolution	1280 x1024
Contrast Ratio	1000:1
Brightness (Backlight Type)	250 nits (No Touch), 212 nits (Capacitive), 200 nits (Resistive), 230 nits (SAW)
View Angle	H:160°, V:160°
Touch LCD Display	
Touch Screen	Resistive
Touch Points	1
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RS232 (DB9)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x DVI (Optional)
Audio Port	NA, 1 x Line in (Optional)
Power Input	1 x AC Power Cord
Physical Properties	
Power Supply	AC Input 100~240Vac, 50/60Hz @1.5A
Speaker	NA, 1 W / 2 Channel (Optional)
Housing Color	Dark Gray
Construction	Glass, SECC, Plastic (ABS)
Compliance	IP65 Compliant Front Side, IPX1
Dimensions (W x H x D) mm	386.8 x 341.9 x 202.0 mm (With Stand), 386.8 x 319.9 x 67.0 mm (Bezel A, Without Stand), 386.8 x 318.8 x 66.0 mm (Bezel B, Without Stand)
Net Weight (kg)	5.8 kg
Gross Weight (kg)	8.1 kg
Carton (W x H x D) mm	460 x 420 x 283 mm
VESA	100 x 100 mm
Safety	
Certifications	CE, FCC, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing