



APC Smart-UPS uninterruptible power supply (UPS) Line-Interactive 1.5 kVA 1200 W 8 AC outlet(s)

Brand : APC

Product code: SMX1500RM12U

Product name : Smart-UPS




Smart-UPS X 1500VA Rack/Tower LCD 230V

APC Smart-UPS. UPS topology: Line-Interactive, Output power capacity: 1.5 kVA, Output power: 1200 W. AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 8 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 311 VAh, Typical backup time at full load: 5.8 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 2U. Width: 432 mm, Depth: 490 mm, Height: 89 mm



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	1.5 kVA	Rack capacity	2U
Output power *	1200 W	Cable length	1.83 m
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	151 V	LED indicators	✓
Input operation voltage (max) *	302 V	Certification	CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOL
Input frequency *	50/60 Hz		
Output frequency regulation	50/60 Hz		
Automatic Voltage Regulation (AVR)	✓		
Surge energy rating	645 J		
Efficiency	98.5%		
Emergency Power Off (EPO)	✓		
Noise level	40 dB		
Audible alarm(s)	✓		
Audible alarm modes	Low battery alarm, Overload alarm		
Auto-restart	✓		
Ports & interfaces		Operational conditions	
AC outlet types	C13 coupler	Operating temperature (T-T)	0 - 40 °C
Power plug	C14 coupler	Storage temperature (T-T)	-15 - 45 °C
AC outlets quantity	8 AC outlet(s)	Operating relative humidity (H-H)	0 - 95%
Number of output IEC jumpers	2	Storage relative humidity (H-H)	0 - 95%
USB port	✓	Operating altitude	0 - 3000 m
SmartSlot	✓	Non-operating altitude	0 - 15000 m
		Technical details	
		Sustainability certificates	RoHS
		Weight & dimensions	
		Width	432 mm
		Depth	490 mm
		Height	89 mm
		Weight	24.8 kg
		Package width	589 mm
		Package depth	620 mm
		Package height	246 mm
		Package weight	30 kg
		Packaging data	
		Rack mount kit	✓

Battery		Packaging data	
Battery life (max)	5 year(s)	Cables included	RS-232, USB cable
Battery recharge time	3 h	Quick installation guide	✓
Hot-swap battery	✓	Software CD	✓
Automatic battery test	✓	Logistics data	
Cold start	✓	Products per pallet	8 pc(s)
		Harmonized System (HS) code	85078000
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Removable support feet

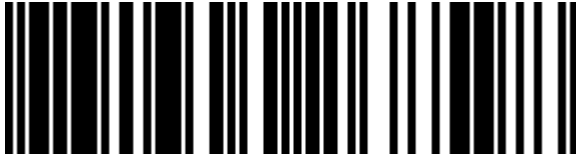

0731304268598



731304268598

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.